

Standard applications

Construction

- Dielectric: polyethylene terephthalate (polyester)
- Stacked-film technology for lead spacing 5 and 7,5 mm as well as for 10 and 15 mm (63 ... 400 Vdc)
- Wound capacitor technology for lead spacing 10 mm (630 Vdc), for lead spacing 15 mm (250 ... 630 Vdc), for lead spacing 22,5 and 27,5 mm
- Plastic case (UL 94 V-0)
- Epoxy resin sealing

Features

- High pulse strength
- High contact reliability

Terminals

- Parallel wire leads, tinned
- Also available with (3,2 ± 0,3) mm lead length
- Special lead lengths available upon request

Marking


Manufacturer's logo,
lot number for lead spacing ≥ 15 mm,
style (MKT) for lead spacing ≥ 7,5 mm,
type (coded) for lead spacing 5 mm (B32529 ± 1),
rated capacitance (coded),
capacitance tolerance (code letter),
rated dc voltage,
date of manufacture (coded)

Delivery mode

Bulk (untaped)
Taped (Ammo pack or reel)
For notes on taping, [refer to page 279](#).

Detail specifications


Homologated in accordance with
CECC 30 401-043
CECC 30 401-052/DIN 44 112



Dimensions in mm


Lead spacing	Diameter d_1	Type
$\overline{e} \pm 0,4$		
5,0	0,5	B 32 529
7,5	0,5	B 32 520
10,0	$0,5^{1)}/0,6$	B 32 521
15,0	0,8	B 32 522
22,5	0,8	B 32 523
27,5	0,8	B 32 524

1) 0,5 mm for capacitor width $b = 4$ mm




Overview of available types

Lead spacing	5 mm	7,5 mm	10 mm	15 mm	22,5 mm	27,5 mm
Type	B 32 529	B 32 520	B 32 521	B 32 522	B 32 523	B 32 524
Page	19	22	24	26	28	29
1,0 nF						
1,5 nF						
2,2 nF						
3,3 nF						
4,7 nF						
6,8 nF						
10 nF						
15 nF						
22 nF						
33 nF						
47 nF						
68 nF						
0,10 µF						
0,15 µF						
0,22 µF						
0,33 µF						
0,47 µF						
0,68 µF						
1,0 µF						
1,5 µF						
2,2 µF						
3,3 µF						
4,7 µF						
6,8 µF						
10 µF						
15 µF						
22 µF						
33 µF						
Note	Stacked-film technology			Stacked-film/ Wound capacitor technology	Wound capacitor technology	


Ordering codes and packing units, lead spacing 5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
50 Vdc (32 Vac)	0,33 μ F	$3,0 \times 6,5 \times 7,2$	B32529-C5334-+***	2700	2400	2000
	0,47 μ F	$3,5 \times 8,0 \times 7,2$	B32529-C5474-+***	2300	2000	2000
	0,68 μ F	$4,5 \times 9,5 \times 7,2$	B32529-C5684-+***	1800	1500	1500
	1,0 μ F	$4,5 \times 9,5 \times 7,3$	B32529-C5105-+***	1800	1500	1500
	1,5 μ F	$6,0 \times 10,5 \times 7,5$	B32529-C5155-+***	1300	1100	1000
	2,2 μ F	$7,2 \times 13,0 \times 7,8$	B32529-C5225-+***	1000	900	1000
	3,3 μ F	$7,2 \times 13,0 \times 7,8$	B32529-C5335-+***	1000	900	1000
63 Vdc (40 Vac)	1,0 nF	$2,5 \times 6,5 \times 7,2$	B32529-C102-+***	3200	2800	2000
	1,5 nF	$2,5 \times 6,5 \times 7,2$	B32529-C152-+***	3200	2800	2000
	2,2 nF	$2,5 \times 6,5 \times 7,2$	B32529-C222-+***	3200	2800	2000
	3,3 nF	$2,5 \times 6,5 \times 7,2$	B32529-C332-+***	3200	2800	2000
	4,7 nF	$2,5 \times 6,5 \times 7,2$	B32529-C472-+***	3200	2800	2000
	6,8 nF	$2,5 \times 6,5 \times 7,2$	B32529-C682-+***	3200	2800	2000
	10 nF	$2,5 \times 6,5 \times 7,2$	B32529-C103-+***	3200	2800	2000
	15 nF	$2,5 \times 6,5 \times 7,2$	B32529-C153-+***	3200	2800	2000
	22 nF	$2,5 \times 6,5 \times 7,2$	B32529-C223-+***	3200	2800	2000
	33 nF	$2,5 \times 6,5 \times 7,2$	B32529-C333-+***	3200	2800	2000
	47 nF	$2,5 \times 6,5 \times 7,2$	B32529-C473-+***	3200	2800	2000
	68 nF	$2,5 \times 6,5 \times 7,2$	B32529-C683-+***	3200	2800	2000
	0,10 μ F	$2,5 \times 6,5 \times 7,2$	B32529-C104-+***	3200	2800	2000
	0,15 μ F	$2,5 \times 6,5 \times 7,2$	B32529-C154-+***	3200	2800	2000
	0,22 μ F	$2,5 \times 6,5 \times 7,2$	B32529-C224-+***	3200	2800	2000
	0,33 μ F	$3,0 \times 6,5 \times 7,2$	B32529-C334-+***	2700	2400	2000
	0,47 μ F	$3,5 \times 8,0 \times 7,2$	B32529-C474-+***	2300	2000	2000
	0,68 μ F	$4,5 \times 9,5 \times 7,2$	B32529-C684-+***	1800	1500	1500
	1,0 μ F	$4,5 \times 9,5 \times 7,2$	B32529-C105-+***	1800	1500	1500
	1,5 μ F	$6,0 \times 10,5 \times 7,5$	B32529-C155-+***	1300	1100	1000
	2,2 μ F	$7,2 \times 13,0 \times 7,8$	B32529-C225-+***	1000	900	1000

1) For instructions on how to determine the ordering code, refer to page 21.




B 32 529

Ordering codes and packing units, lead spacing 5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
100 Vdc (63 Vac)	1,0 nF	2,5 × 6,5 × 7,2	B32529-C1102-****	3200	2800	2000
	1,5 nF	2,5 × 6,5 × 7,2	B32529-C1152-****	3200	2800	2000
	2,2 nF	2,5 × 6,5 × 7,2	B32529-C1222-****	3200	2800	2000
	3,3 nF	2,5 × 6,5 × 7,2	B32529-C1332-****	3200	2800	2000
	4,7 nF	2,5 × 6,5 × 7,2	B32529-C1472-****	3200	2800	2000
	6,8 nF	2,5 × 6,5 × 7,2	B32529-C1682-****	3200	2800	2000
	10 nF	2,5 × 6,5 × 7,2	B32529-C1103-****	3200	2800	2000
	15 nF	2,5 × 6,5 × 7,2	B32529-C1153-****	3200	2800	2000
	22 nF	2,5 × 6,5 × 7,2	B32529-C1223-****	3200	2800	2000
	33 nF	2,5 × 6,5 × 7,2	B32529-C1333-****	3200	2800	2000
	47 nF	2,5 × 6,5 × 7,2	B32529-C1473-****	3200	2800	2000
	68 nF	2,5 × 6,5 × 7,2	B32529-C1683-****	3200	2800	2000
	0,10 μF	2,5 × 6,5 × 7,2	B32529-C1104-****	3200	2800	2000
	0,15 μF	3,0 × 6,5 × 7,2	B32529-C1154-****	2700	2400	2000
	0,22 μF	3,5 × 8,0 × 7,2	B32529-C1224-****	2300	2000	2000
	0,33 μF	3,5 × 8,0 × 7,2	B32529-C1334-****	2300	2000	2000
	0,47 μF	4,5 × 9,5 × 7,3	B32529-C1474-****	1800	1500	1500
	0,68 μF	6,0 × 10,5 × 7,5	B32529-C1684-****	1300	1100	1000
	1,0 μF	7,2 × 13,0 × 7,8	B32529-C1105-****	1000	900	1000
250 Vdc (160 Vac)	1,0 nF	2,5 × 6,5 × 7,2	B32529-C3102-****	3200	2800	2000
	1,5 nF	2,5 × 6,5 × 7,2	B32529-C3152-****	3200	2800	2000
	2,2 nF	2,5 × 6,5 × 7,2	B32529-C3222-****	3200	2800	2000
	3,3 nF	2,5 × 6,5 × 7,2	B32529-C3332-****	3200	2800	2000
	4,7 nF	2,5 × 6,5 × 7,2	B32529-C3472-****	3200	2800	2000
	6,8 nF	2,5 × 6,5 × 7,2	B32529-C3682-****	3200	2800	2000
	10 nF	2,5 × 6,5 × 7,2	B32529-C3103-****	3200	2800	2000
	15 nF	2,5 × 6,5 × 7,2	B32529-C3153-****	3200	2800	2000
	22 nF	2,5 × 6,5 × 7,2	B32529-C3223-****	3200	2800	2000
	33 nF	3,0 × 6,5 × 7,2	B32529-C3333-****	2700	2400	2000
	47 nF	3,5 × 8,0 × 7,2	B32529-C3473-****	2300	2000	2000
	68 nF	4,5 × 9,5 × 7,3	B32529-C3683-****	1800	1500	1500
	0,10 μF	4,5 × 9,5 × 7,3	B32529-C3104-****	1800	1500	1500
	0,15 μF	5,0 × 10,0 × 7,5	B32529-C3154-****	1600	1400	1500
	0,22 μF	7,2 × 13,0 × 7,8	B32529-C3224-****	1000	900	1000


1) For instructions on how to determine the ordering code, refer to page 21.


Ordering codes and packing units, lead spacing 5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
400 Vdc (200 Vac)	1,0 nF	2,5 × 6,5 × 7,2	B32529-C6102-****	3200	2800	2000
	1,5 nF	2,5 × 6,5 × 7,2	B32529-C6152-****	3200	2800	2000
	2,2 nF	2,5 × 6,5 × 7,2	B32529-C6222-****	3200	2800	2000
	3,3 nF	2,5 × 6,5 × 7,2	B32529-C6332-****	3200	2800	2000
	4,7 nF	2,5 × 6,5 × 7,2	B32529-C6472-****	3200	2800	2000
	6,8 nF	2,5 × 6,5 × 7,2	B32529-C6682-****	3200	2800	2000
	10 nF	3,0 × 6,5 × 7,2	B32529-C6103-****	2700	2400	2000
	15 nF	3,5 × 8,0 × 7,2	B32529-C6153-****	2300	2000	2000
	22 nF	4,5 × 9,5 × 7,3	B32529-B6223-****	1800	1500	1500
	33 nF	5,0 × 10,0 × 7,5	B32529-B6333-****	1600	1400	1500
	47 nF	6,0 × 10,5 × 7,5	B32529-B6473-****	1300	1100	1000
	68 nF	7,2 × 13,0 × 7,8	B32529-B6683-****	1000	900	1000
	0,10 μF	7,2 × 13,0 × 7,8	B32529-C6104-****	1000	900	1000
630 Vdc (400 Vac)	1,0 nF	2,5 × 6,5 × 7,2	B32529-C8102-****	3200	2800	2000
	1,5 nF	2,5 × 6,5 × 7,2	B32529-C8152-****	3200	2800	2000
	2,2 nF	2,5 × 6,5 × 7,2	B32529-C8222-****	3200	2800	2000
	3,3 nF	3,5 × 8,0 × 7,2	B32529-C8332-****	2300	2000	2000
	4,7 nF	3,5 × 8,0 × 7,2	B32529-C8472-****	2300	2000	2000
	6,8 nF	3,5 × 8,0 × 7,2	B32529-C8682-****	2300	2000	2000
	10 nF	5,0 × 10,0 × 7,5	B32529-C8103-****	1600	1400	1500

Capacitance tolerance: $\pm 20\% \hat{=} M$, $\pm 10\% \hat{=} K$, $\pm 5\% \hat{=} J$.

1) Replace the + by the code letter for the required capacitance tolerance.
 Replace the *** by the code number for the required packing: Ammo pack = 289, reel = 189
 The ordering code for untaped components ends after the tolerance code letter.
 For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32529-C6102-K3




B 32 520

Ordering codes and packing units, lead spacing 7,5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
63 Vdc (40 Vac)	68 nF	2,5 × 7,0 × 10,0	B32520-C683-+***	3200	2800	2500
	0,10 μF	2,5 × 7,0 × 10,0	B32520-C104-+***	3200	2800	2500
	0,15 μF	2,5 × 7,0 × 10,0	B32520-C154-+***	3200	2800	2500
	0,22 μF	2,5 × 7,0 × 10,0	B32520-C224-+***	3200	2800	2500
	0,33 μF	2,5 × 7,0 × 10,0	B32520-C334-+***	3200	2800	2500
	0,47 μF	3,0 × 8,0 × 10,0	B32520-C474-+***	2600	2400	2000
	0,68 μF	4,0 × 8,5 × 10,0	B32520-C684-+***	2000	1800	1500
	1,0 μF	5,0 × 10,5 × 10,0	B32520-C105-+***	1600	1400	1000
	1,5 μF	5,0 × 10,5 × 10,0	B32520-C155-+***	1600	1400	1000
	2,2 μF	6,0 × 12,0 × 10,3	B32520-C225-+***	1300	1100	750
100 Vdc (63 Vac)	47 nF	2,5 × 7,0 × 10,0	B32520-C1473-+***	3200	2800	2500
	68 nF	2,5 × 7,0 × 10,0	B32520-C1683-+***	3200	2800	2500
	0,10 μF	2,5 × 7,0 × 10,0	B32520-C1104-+***	3200	2800	2500
	0,15 μF	3,0 × 8,0 × 10,0	B32520-C1154-+***	2600	2400	2000
	0,22 μF	3,0 × 8,0 × 10,0	B32520-C1224-+***	2600	2400	2000
	0,33 μF	4,0 × 8,5 × 10,0	B32520-C1334-+***	2000	1800	1500
	0,47 μF	5,0 × 10,5 × 10,0	B32520-C1474-+***	1600	1400	1000
	0,68 μF	6,0 × 12,0 × 10,3	B32520-C1684-+***	1300	1100	750
250 Vdc (160 Vac)	15 nF	2,5 × 7,0 × 10,0	B32520-C3153-+***	3200	2800	2500
	22 nF	2,5 × 7,0 × 10,0	B32520-C3223-+***	3200	2800	2500
	33 nF	2,5 × 7,0 × 10,0	B32520-C3333-+***	3200	2800	2500
	47 nF	2,5 × 7,0 × 10,0	B32520-C3473-+***	3200	2800	2500
	68 nF	3,0 × 8,0 × 10,0	B32520-C3683-+***	2600	2400	2000
	0,10 μF	4,0 × 8,5 × 10,0	B32520-C3104-+***	2000	1800	1500
	0,15 μF	5,0 × 10,5 × 10,0	B32520-C3154-+***	1600	1400	1000


1) For instructions on how to determine the ordering code, see next page.


Ordering codes and packing units, lead spacing 7,5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
400 Vdc (200 Vac)	1,0 nF	2,5 × 7,0 × 10,0	B32520-C6102-****	3200	2800	2500
	1,5 nF	2,5 × 7,0 × 10,0	B32520-C6152-****	3200	2800	2500
	2,2 nF	2,5 × 7,0 × 10,0	B32520-C6222-****	3200	2800	2500
	3,3 nF	2,5 × 7,0 × 10,0	B32520-C6332-****	3200	2800	2500
	4,7 nF	2,5 × 7,0 × 10,0	B32520-C6472-****	3200	2800	2500
	6,8 nF	2,5 × 7,0 × 10,0	B32520-C6682-****	3200	2800	2500
	10 nF	2,5 × 7,0 × 10,0	B32520-C6103-****	3200	2800	2500
	15 nF	3,0 × 8,0 × 10,0	B32520-C6153-****	2600	2400	2000
	22 nF	4,0 × 8,5 × 10,0	B32520-C6223-****	2000	1800	1500
	33 nF	5,0 × 10,5 × 10,0	B32520-C6333-****	1600	1400	1000
	47 nF	5,0 × 10,5 × 10,0	B32520-C6473-****	1600	1400	1000
	68 nF	6,0 × 12,0 × 10,3	B32520-C6683-****	1300	1100	750

Capacitance tolerance: $\pm 20\% \hat{=} M, \pm 10\% \hat{=} K, \pm 5\% \hat{=} J$

1) Replace the + by the code letter for the required capacitance tolerance.
 Replace the *** by the code number for the required packaging: Ammo pack = 289, reel = 189
 The ordering code for untaped components ends after the tolerance code letter.
 For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32520-C6102-K3




B 32 521

Ordering codes and packing units, lead spacing 10 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
63 Vdc (40 Vac)	0,47 μ F	4,0 \times 7,0 \times 13,0	B32521-C474-+***	1000	1700	1000
	0,68 μ F	4,0 \times 7,0 \times 13,0	B32521-C684-+***	1000	1700	1000
	1,0 μ F	4,0 \times 9,0 \times 13,0	B32521-C105-+***	1000	1700	1000
	1,5 μ F	5,0 \times 11,0 \times 13,0	B32521-C155-+***	830	1300	1000
	2,2 μ F	5,0 \times 11,0 \times 13,0	B32521-C225-+***	830	1300	1000
	3,3 μ F	6,0 \times 12,0 \times 13,0	B32521-C335-+***	680	1100	1000
100 Vdc (63 Vac)	0,10 μ F	4,0 \times 7,0 \times 13,0	B32521-C1104-+***	1000	1700	1000
	0,15 μ F	4,0 \times 7,0 \times 13,0	B32521-C1154-+***	1000	1700	1000
	0,22 μ F	4,0 \times 7,0 \times 13,0	B32521-C1224-+***	1000	1700	1000
	0,33 μ F	4,0 \times 7,0 \times 13,0	B32521-C1334-+***	1000	1700	1000
	0,47 μ F	4,0 \times 9,0 \times 13,0	B32521-C1474-+***	1000	1700	1000
	0,68 μ F	5,0 \times 11,0 \times 13,0	B32521-C1684-+***	830	1300	1000
250 Vdc (160 Vac)	1,0 μ F	6,0 \times 12,0 \times 13,0	B32521-C1105-+***	680	1100	1000
	33 nF	4,0 \times 7,0 \times 13,0	B32521-C3333-+***	1000	1700	1000
	47 nF	4,0 \times 7,0 \times 13,0	B32521-C3473-+***	1000	1700	1000
	68 nF	4,0 \times 7,0 \times 13,0	B32521-C3683-+***	1000	1700	1000
	0,10 μ F	4,0 \times 7,0 \times 13,0	B32521-C3104-+***	1000	1700	1000
	0,15 μ F	4,0 \times 9,0 \times 13,0	B32521-C3154-+***	1000	1700	1000
	0,22 μ F	5,0 \times 11,0 \times 13,0	B32521-C3224-+***	830	1300	1000
	0,33 μ F	5,0 \times 11,0 \times 13,0	B32521-C3334-+***	830	1300	1000
400 Vdc (200 Vac)	0,47 μ F	6,0 \times 12,0 \times 13,0	B32521-C3474-+***	680	1100	1000
	10 nF	4,0 \times 7,0 \times 13,0	B32521-C6103-+***	1000	1700	1000
	15 nF	4,0 \times 7,0 \times 13,0	B32521-C6153-+***	1000	1700	1000
	22 nF	4,0 \times 7,0 \times 13,0	B32521-C6223-+***	1000	1700	1000
	33 nF	4,0 \times 9,0 \times 13,0	B32521-C6333-+***	1000	1700	1000
	47 nF	5,0 \times 11,0 \times 13,0	B32521-C6473-+***	830	1300	1000
	68 nF	5,0 \times 11,0 \times 13,0	B32521-C6683-+***	830	1300	1000
	0,10 μ F	6,0 \times 12,0 \times 13,0	B32521-C6104-+***	680	1100	1000


1) For instructions on how to determine the ordering code, see next page.


Ordering codes and packing units, lead spacing 10 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
630 Vdc (200 Vac)	6,8 nF ²⁾	4,0 × 9,0 × 13,0	B32521-N8682-+***	1000	1700	1000
	10 nF ²⁾	4,0 × 9,0 × 13,0	B32521-N8103-+***	1000	1700	1000
	15 nF ²⁾	5,0 × 11,0 × 13,0	B32521-N8153-+***	830	1300	1000
	22 nF ²⁾	5,0 × 11,0 × 13,0	B32521-N8223-+***	830	1300	1000
	33 nF ²⁾	6,0 × 12,0 × 13,0	B32521-N8333-+***	680	1100	1000

Capacitance tolerance: $\pm 20\% \hat{=} M$, $\pm 10\% \hat{=} K$, $\pm 5\% \hat{=} J$

- 1) Replace the + by the code letter for the required capacitance tolerance.
 Replace the *** by the code number for the required packing: Ammo pack = 289, reel = 189
 The ordering code for untaped components ends after the tolerance code letter.
 For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32521-N8682-K3
- 2) Wound capacitor technology




B 32 522

Ordering codes and packing units, lead spacing 15 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
63 Vdc (40 Vac)	0,68 μ F	5,0 × 10,5 × 18,0	B32522-C684-+***	1170	1300	1000
	1,0 μ F	5,0 × 10,5 × 18,0	B32522-C105-+***	1170	1300	1000
	1,5 μ F	5,0 × 10,5 × 18,0	B32522-C155-+***	1170	1300	1000
	2,2 μ F	5,0 × 10,5 × 18,0	B32522-C225-+***	1170	1300	1000
	3,3 μ F	6,0 × 11,0 × 18,0	B32522-C335-+***	960	1100	1000
	4,7 μ F	7,0 × 12,5 × 18,0	B32522-C475-+***	830	900	1000
100 Vdc (63 Vac)	0,33 μ F	5,0 × 10,5 × 18,0	B32522-C1334-+***	1170	1300	1000
	0,47 μ F	5,0 × 10,5 × 18,0	B32522-C1474-+***	1170	1300	1000
	0,68 μ F	5,0 × 10,5 × 18,0	B32522-C1684-+***	1170	1300	1000
	1,0 μ F	5,0 × 10,5 × 18,0	B32522-C1105-+***	1170	1300	1000
	1,5 μ F	6,0 × 11,0 × 18,0	B32522-C1155-+***	960	1100	1000
	2,2 μ F	7,0 × 12,5 × 18,0	B32522-C1225-+***	830	900	1000
250 Vdc (160 Vac)	3,3 μ F	8,5 × 14,5 × 18,0	B32522-C1335-+***	680	700	500
	0,10 μ F	5,0 × 10,5 × 18,0	B32522-C3104-+***	1170	1300	1000
	0,15 μ F	5,0 × 10,5 × 18,0	B32522-C3154-+***	1170	1300	1000
	0,22 μ F	5,0 × 10,5 × 18,0	B32522-C3224-+***	1170	1300	1000
	0,33 μ F	5,0 × 10,5 × 18,0	B32522-C3334-+***	1170	1300	1000
	0,47 μ F	6,0 × 11,0 × 18,0	B32522-C3474-+***	960	1100	1000
400 Vdc (200 Vac)	0,68 μ F	7,0 × 12,5 × 18,0	B32522-C3684-+***	830	900	1000
	1,0 μ F	8,5 × 14,5 × 18,0	B32522-C3105-+***	680	700	500
	1,0 μ F ²⁾	8,5 × 14,5 × 18,0	B32522-N3105-+***	680	700	500
	47 nF	5,0 × 10,5 × 18,0	B32522-C6473-+***	1170	1300	1000
	68 nF	5,0 × 10,5 × 18,0	B32522-C6683-+***	1170	1300	1000
	0,10 μ F	5,0 × 10,5 × 18,0	B32522-C6104-+***	1170	1300	1000
400 Vdc (200 Vac)	0,10 μ F ²⁾	5,0 × 10,5 × 18,0	B32522-N6104-+***	1170	1300	1000
	0,15 μ F	6,0 × 11,0 × 18,0	B32522-C6154-+***	960	1100	1000
	0,15 μ F ²⁾	5,0 × 10,5 × 18,0	B32522-N6154-+***	1170	1300	1000
	0,22 μ F	7,0 × 12,5 × 18,0	B32522-C6224-+***	830	900	1000
	0,22 μ F ²⁾	6,0 × 11,0 × 18,0	B32522-N6224-+***	960	1100	1000
	0,33 μ F	8,5 × 14,5 × 18,0	B32522-C6334-+***	680	700	500
	0,33 μ F ²⁾	8,5 × 14,5 × 18,0	B32522-N6334-+***	680	700	500
	0,47 μ F ²⁾	8,5 × 14,5 × 18,0	B32522-N6474-+***	680	700	500
	0,68 μ F ²⁾	9,0 × 17,5 × 18,0	B32522-N6684-+***	640	700	500

1) For instructions on how to determine the ordering code, see next page.

2) Wound capacitor technology


Ordering codes and packing units, lead spacing 15 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
630 Vdc (200 Vac)	33 nF ²⁾	5,0 × 10,5 × 18,0	B32522-Q8333-+***	1170	1300	1000
	47 nF ²⁾	5,0 × 10,5 × 18,0	B32522-Q8473-+***	1170	1300	1000
	68 nF ²⁾	6,0 × 11,0 × 18,0	B32522-Q8683-+***	960	1100	1000
	0,10 μF ²⁾	7,0 × 12,5 × 18,0	B32522-Q8104-+***	830	900	1000


Capacitance tolerance: $\pm 20\% \hat{=} M$, $\pm 10\% \hat{=} K$, $\pm 5\% \hat{=} J$

1) Replace the + by the code letter for the required packing: Ammo pack = 289, reel = 189

The ordering code for untaped components ends after the tolerance code letter.

For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32522-Q8104-K3

2) Wound capacitor technology



B 32 523

Ordering codes and packing units, lead spacing 22,5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
63 Vdc (40 Vac)	6,8 μ F	8,5 \times 16,5 \times 26,5	B32523-Q685-+***	480	500	510
	10 μ F	11,0 \times 20,5 \times 26,5	B32523-Q106-+***	370	350	510
100 Vdc (63 Vac)	1,5 μ F	6,0 \times 15,0 \times 26,5	B32523-Q1155-+***	680	700	720
	2,2 μ F	6,0 \times 15,0 \times 26,5	B32523-Q1225-+***	680	700	720
	3,3 μ F	6,0 \times 15,0 \times 26,5	B32523-Q1335-+***	680	700	720
	4,7 μ F	8,5 \times 16,5 \times 26,5	B32523-Q1475-+***	480	500	510
	6,8 μ F	10,5 \times 16,5 \times 26,5	B32523-Q1685-+***	390	400	540
250 Vdc (160 Vac)	0,47 μ F	6,0 \times 15,0 \times 26,5	B32523-Q3474-+***	680	700	720
	0,68 μ F	6,0 \times 15,0 \times 26,5	B32523-Q3684-+***	680	700	720
	1,0 μ F	6,0 \times 15,0 \times 26,5	B32523-Q3105-+***	680	700	720
	1,5 μ F	7,0 \times 16,0 \times 26,5	B32523-Q3155-+***	580	600	630
	2,2 μ F	10,5 \times 16,5 \times 26,5	B32523-Q3225-+***	390	400	540
	3,3 μ F	11,0 \times 20,5 \times 26,5	B32523-Q3335-+***	370	350	510
400 Vdc (200 Vac)	0,22 μ F	6,0 \times 15,0 \times 26,5	B32523-Q6224-+***	680	700	720
	0,33 μ F	6,0 \times 15,0 \times 26,5	B32523-Q6334-+***	680	700	720
	0,47 μ F	7,0 \times 16,0 \times 26,5	B32523-Q6474-+***	580	600	630
	0,68 μ F	8,5 \times 16,5 \times 26,5	B32523-Q6684-+***	480	500	510
630 Vdc (200 Vac)	0,10 μ F	6,0 \times 15,0 \times 26,5	B32523-Q8104-+***	680	700	720
	0,15 μ F	6,0 \times 15,0 \times 26,5	B32523-Q8154-+***	680	700	720
	0,22 μ F	7,0 \times 16,0 \times 26,5	B32523-Q8224-+***	580	600	630


Capacitance tolerance: $\pm 20\% \hat{=} M$, $\pm 10\% \hat{=} K$, $\pm 5\% \hat{=} J$

1) Replace the + by the code letter for the required capacitance tolerance.

Replace the *** by the code number for the required packing: Ammo pack = 289, reel = 189

The ordering code for untaped components ends after the tolerance code letter.


For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32523-Q685-K3


Ordering codes and packing units, lead spacing 27,5 mm

V_R (V_{rms} , $f \leq 60$ Hz)	C_R	Maximum dimensions $b \times h \times l$ (mm)	Ordering code ¹⁾	Packing units (pcs)		
				Ammo pack	Reel	Untaped
100 Vdc (63 Vac)	6,8 μ F	11,0 \times 21,0 \times 31,5	B32524-Q1685-+***	–	350	320
	10 μ F	11,0 \times 21,0 \times 31,5	B32524-Q1106-+***	–	350	320
	15 μ F	12,5 \times 21,5 \times 31,5	B32524-Q1156-+***	–	300	280
	22 μ F	15,0 \times 24,5 \times 31,5	B32524-Q1226-+***	–	–	240
	33 μ F	19,0 \times 30,0 \times 31,5	B32524-Q1336-+***	–	–	180
250 Vdc (160 Vac)	2,2 μ F	11,0 \times 21,0 \times 31,5	B32524-Q3225-+***	–	350	320
	3,3 μ F	11,0 \times 21,0 \times 31,5	B32524-Q3335-+***	–	350	320
	4,7 μ F	11,0 \times 21,0 \times 31,5	B32524-Q3475-+***	–	350	320
	6,8 μ F	14,0 \times 24,5 \times 31,5	B32524-Q3685-+***	–	–	260
	10 μ F	18,0 \times 27,5 \times 31,5	B32524-Q3106-+***	–	–	200
400 Vdc (200 Vac)	1,0 μ F	11,0 \times 21,0 \times 31,5	B32524-Q6105-+***	–	350	320
	1,5 μ F	11,0 \times 21,0 \times 31,5	B32524-Q6155-+***	–	350	320
	2,2 μ F	12,5 \times 21,5 \times 31,5	B32524-Q6225-+***	–	300	280
	3,3 μ F	15,0 \times 24,5 \times 31,5	B32524-Q6335-+***	–	–	240
	4,7 μ F	18,0 \times 27,5 \times 31,5	B32524-Q6475-+***	–	–	200
630 Vdc (220 Vac)	0,33 μ F	11,0 \times 21,0 \times 31,5	B32524-Q8334-+***	–	350	320
	0,47 μ F	11,0 \times 21,0 \times 31,5	B32524-Q8474-+***	–	350	320
	0,68 μ F	11,0 \times 21,0 \times 31,5	B32524-Q8684-+***	–	350	320
	1,0 μ F	14,0 \times 24,5 \times 31,5	B32524-Q8105-+***	–	–	260
	1,5 μ F	18,0 \times 27,5 \times 31,5	B32524-Q8155-+***	–	–	200


Capacitance tolerance: $\pm 20\% \hat{=} M, \pm 10\% \hat{=} K, \pm 5\% \hat{=} J$

1) Replace the + by the code letter for the required capacitance tolerance.
 Replace the *** by the code number for the required packaging: reel = 189
 The ordering code for untaped components ends after the tolerance code letter.
 For capacitors with 3,2 mm lead length, append code number "3" to the tolerance code, e.g.: B32524-Q1685-K3




Technical data

Climatic category in accordance with IEC 68-1	55/100/56			
Lower category temperature T_{min}	- 55 °C			
Upper category temperature T_{max}	+ 100 °C (+ 125 °C for 1000 h and $V_C = 0,5 \cdot V_R$)			
Damp heat test	56 days/40 °C/93 % relative humidity			
Limit values after damp heat test	Capacitance change $ \Delta C/C $	$\leq 5 \%$		
	Dissipation factor change $\Delta \tan \delta$	$\leq 5 \cdot 10^{-3}$ (at 1 kHz)		
	Insulation resistance R_{is}	$\geq 50 \%$ of minimum		
	or time constant $\tau = C_R \cdot R_{is}$	as-delivered values		
Reliability:				
Reference conditions	0,5 · V_R ; 40 °C			
Failure rate	1 · 10 ⁻⁹ /h = 1 fit			
	For a conversion table for other operating conditions and temperatures, refer to page 276.			
Service life	200 000 h			
Failure criteria:				
Total failure	Short circuit or open circuit			
Failure due to variation of parameters	Capacitance change $ \Delta C/C $	$> 10 \%$		
	Dissipation factor $\tan \delta$	$> 2 \cdot$ upper limit value		
	Insulation resistance R_{is}	$< 150 \text{ M}\Omega$ ($C_R \leq 0,33 \mu\text{F}$)		
	or time constant $\tau = C_R \cdot R_{is}$	$< 50 \text{ s}$ ($C_R > 0,33 \mu\text{F}$)		
DC test voltage	1,4 · V_R , 2 s			
Category voltage V_C	$T \leq 85 \text{ °C}$: $V_C = 1,0 \cdot V_R$ or $1,0 \cdot V_{rms}$			
Operation with dc voltage or ac voltage V_{rms} up to 60 Hz	$T \leq 100 \text{ °C}$: $V_C = 0,8 \cdot V_R$ or $0,8 \cdot V_{rms}$			
Category voltage for short operating periods	$T \leq 100 \text{ °C}$: $V_C = 1,25 \cdot V_R$ or $1,0 \cdot V_{rms}$ for max. 2000 h			
	$T \leq 125 \text{ °C}$: $V_C = 0,5 \cdot V_R$ or $0,5 \cdot V_{rms}$ for max. 1000 h			
Dissipation factor $\tan \delta$ (in 10 ⁻³) at 20 °C (upper limit values)		$C_R \leq 0,1 \mu\text{F}$	$0,1 \mu\text{F} < C_R \leq 1 \mu\text{F}$	$C_R > 1 \mu\text{F}$
	at 1 kHz	8	10	10
	10 kHz	15	20	–
	100 kHz	30	–	–
Insulation resistance R_{is} or time constant $\tau = C_R \cdot R_{is}$ at 20 °C, rel. humidity $\leq 65 \%$ (minimum as-delivered values)	V_R	$C_R \leq 0,33 \mu\text{F}$	$C_R > 0,33 \mu\text{F}$	
	$\leq 100 \text{ Vdc}$	3750 M Ω	1250 s	
	$\geq 250 \text{ Vdc}$	7500 M Ω	2500 s	



Impedance Z
versus
frequency f
(typical values)

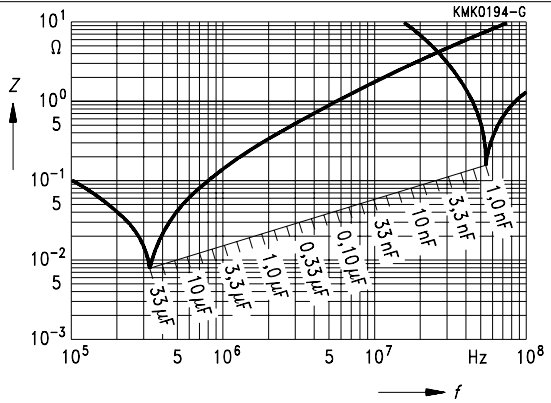

Pulse handling capability


Maximum permissible voltage change per unit of time for non-sinusoidal voltages (pulse, sawtooth)

V_R	Max. rate of voltage rise V_{pp}/τ in $V/\mu s$ (for $V_{pp} = V_R$)					
	Lead spacing					
	5 mm	7,5 mm	10 mm ¹⁾	15 mm ¹⁾	22,5 mm ¹⁾	27,5 mm ¹⁾
50 Vdc	200	–	–	–	–	–
63 Vdc	250	120	50	30	(2)	–
100 Vdc	300	150	75	50	(2,5)	(2)
250 Vdc	400	200	150	100 (10)	(4)	(3)
400 Vdc	600	275	175	125 (12,5)	(7)	(5)
630 Vdc	800	–	(20)	(15)	(10)	(8)

For $V_{pp} < V_R$, the permissible voltage rise rate value V_{pp}/τ may be multiplied by the factor V_R/V_{pp} . Also refer to the calculation example on [page 250](#).

V_R	Pulse characteristic k_0 in $V^2/\mu s$ (for $V_{pp} \leq V_R$)					
	Lead spacing					
	5 mm	7,5 mm	10 mm ¹⁾	15 mm ¹⁾	22,5 mm ¹⁾	27,5 mm ¹⁾
50 Vdc	20 000	–	–	–	–	–
63 Vdc	30 000	15 000	6 300	3 800	(250)	–
100 Vdc	60 000	30 000	15 000	10 000	(500)	(400)
250 Vdc	200 000	100 000	75 000	50 000 (5 000)	(2 000)	(1 500)
400 Vdc	500 000	220 000	140 000	100 000 (10 000)	(5 600)	(4 000)
630 Vdc	1 000 000	–	(25 000)	(19 000)	(12 600)	(10 000)

1) Values in brackets apply to wound capacitors




B 32 529


Permissible ac voltage V_{rms} versus frequency f

Lead spacing 5 mm


50 Vdc/32 Vac

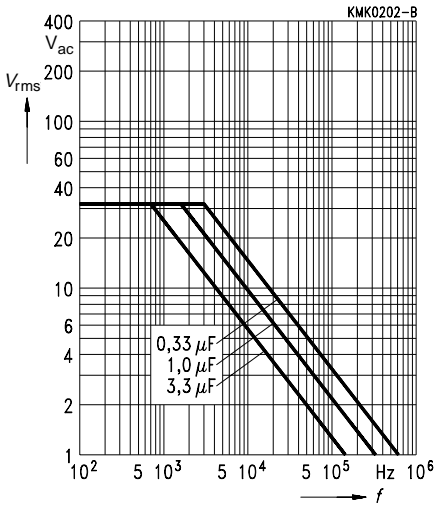


63 Vdc/40 Vac

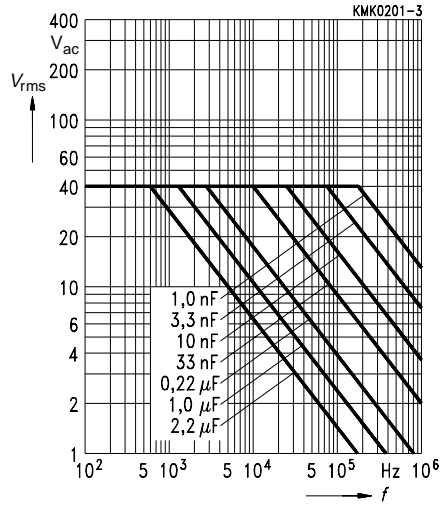


100 Vdc/63 Vac

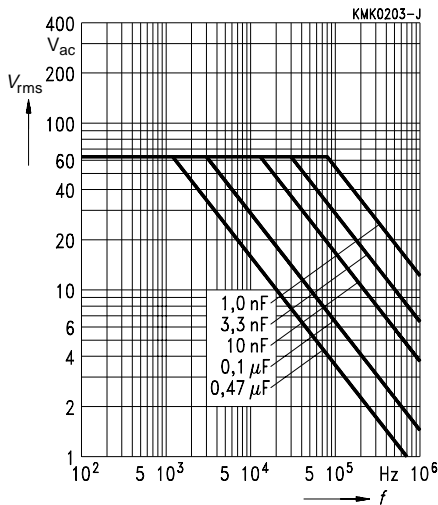

250 Vdc/160 Vac

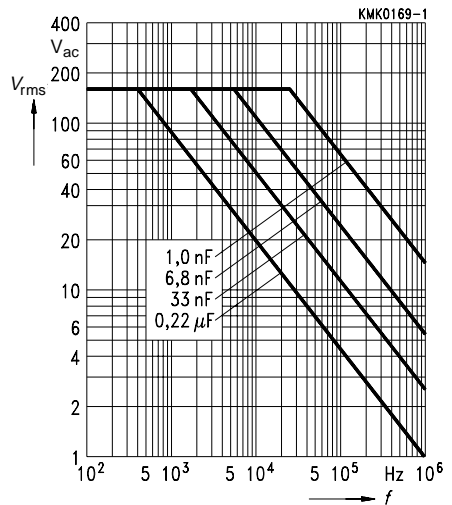





Permissible ac voltage V_{rms} versus frequency f


Lead spacing 5 mm

400 Vdc/ 200 Vac

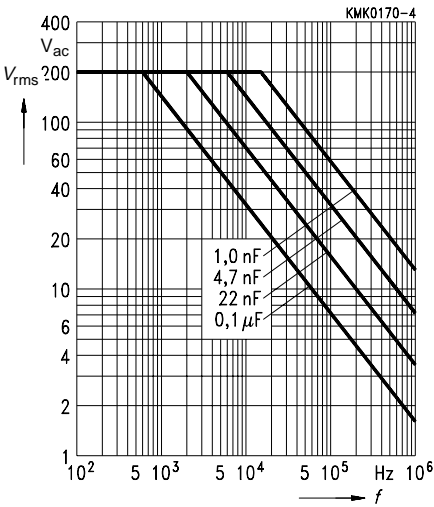

630 Vdc/ 400 Vac

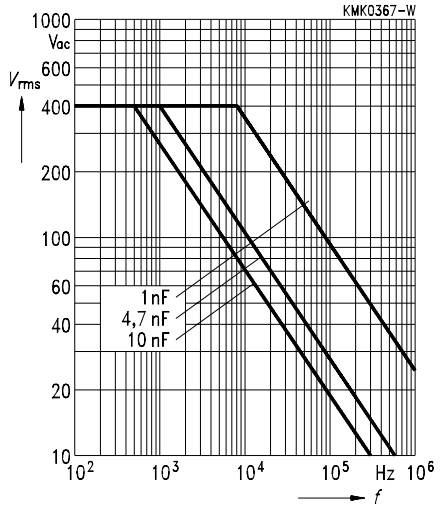




B 32 520


Permissible ac voltage V_{rms} versus frequency f

Lead spacing 7,5 mm


63 Vdc/ 40 Vac

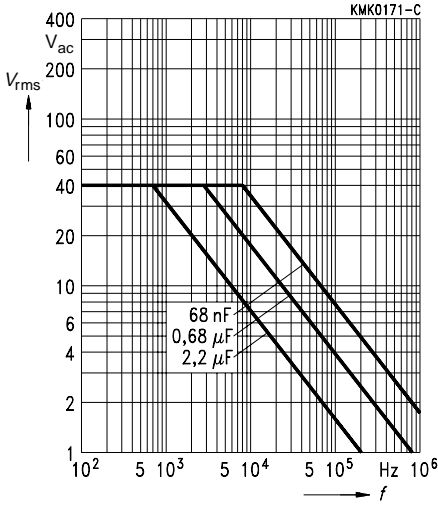


100 Vdc/ 63 Vac

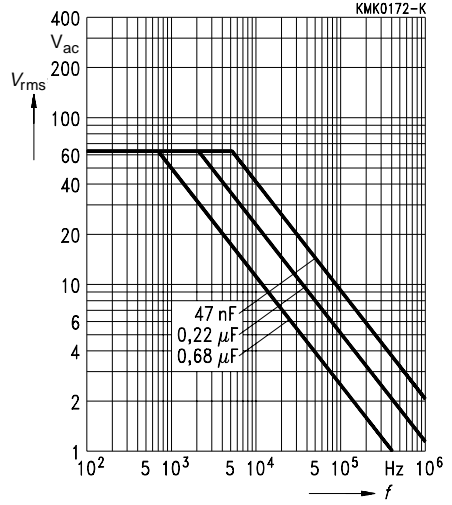


250 Vdc/ 160 Vac

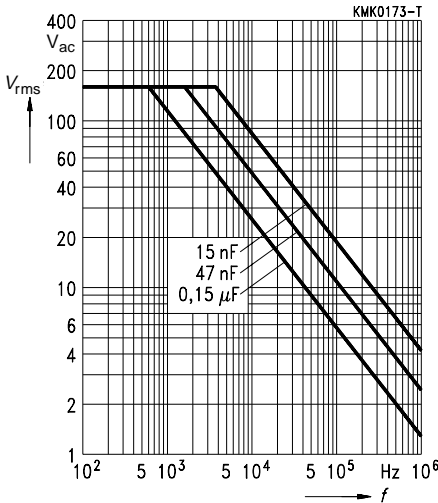

400 Vdc/ 200 Vac

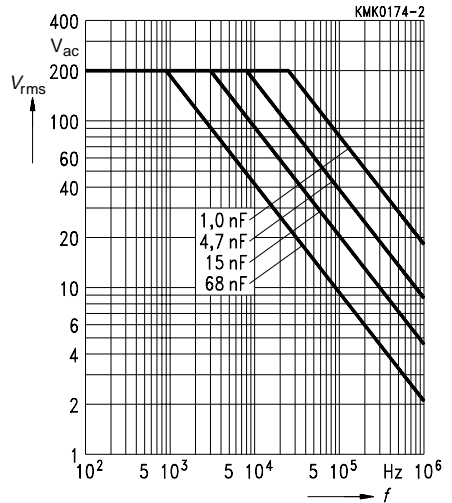





Permissible ac voltage V_{rms} versus frequency f

Lead spacing 10 mm


63 Vdc/ 40 Vac

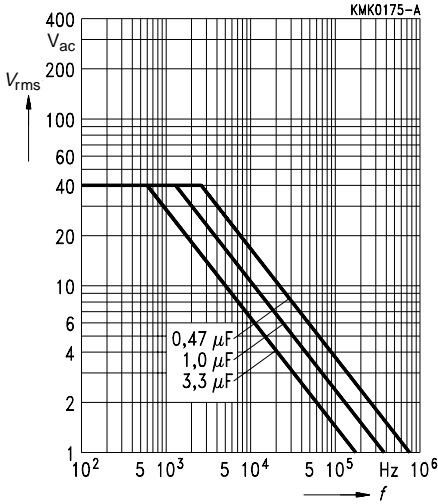


100 Vdc/ 63 Vac

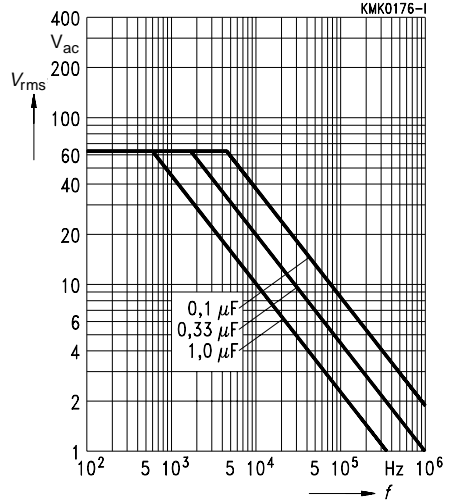


250 Vdc/ 160 Vac

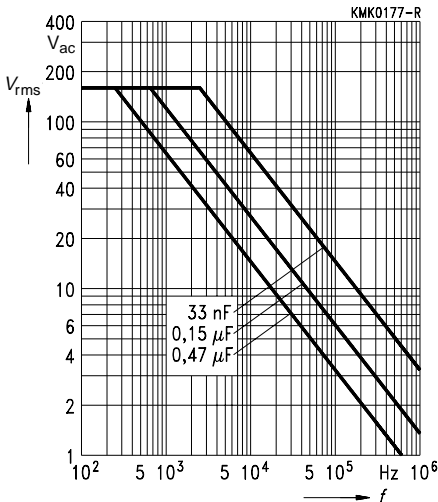

400 Vdc/ 200 Vac

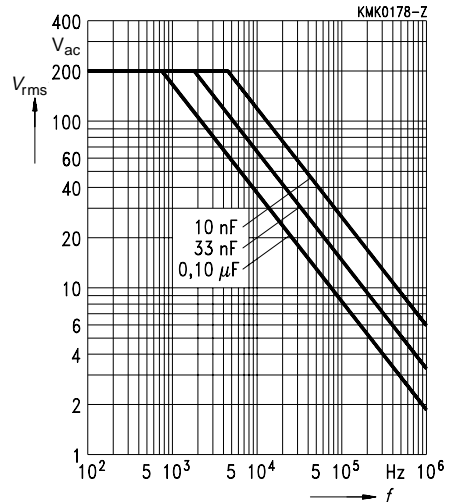





B 32 521

Permissible ac voltage V_{rms} versus frequency f

Lead spacing 10 mm

630 Vdc/ 200 Vac

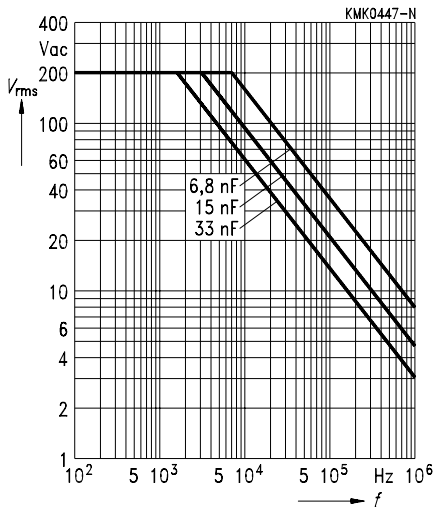





Permissible ac voltage V_{rms} versus frequency f

Lead spacing 15 mm


63 Vdc/ 40 Vac

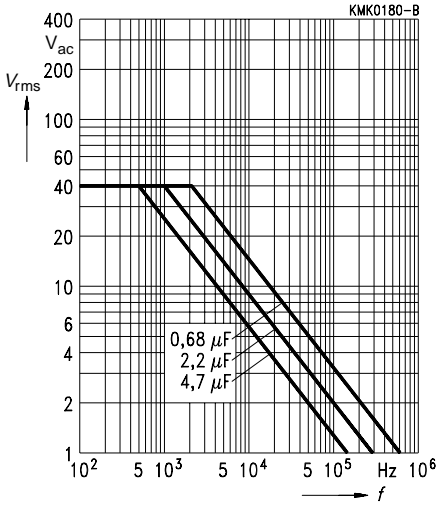


100 Vdc/ 63 Vac

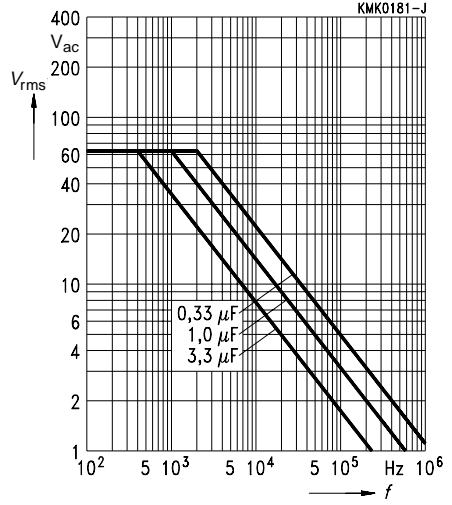


250 Vdc/ 160 Vac

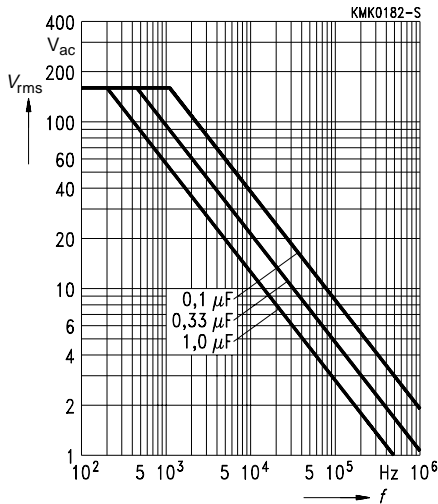

400 Vdc/ 200 Vac

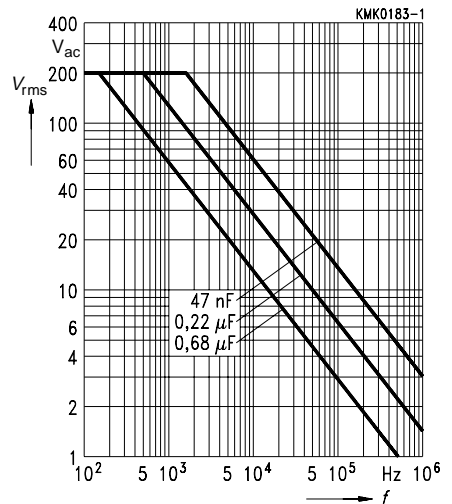





B 32 522

Permissible ac voltage V_{rms} versus frequency f

Lead spacing 15 mm

630 Vdc/ 200 Vac

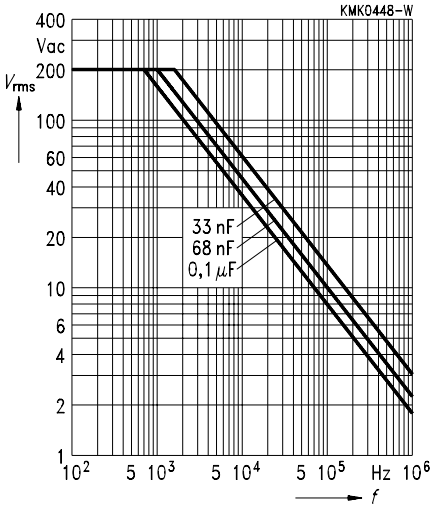





Permissible ac voltage V_{rms} versus frequency f

Lead spacing 22,5 mm


63 Vdc/ 40 Vac

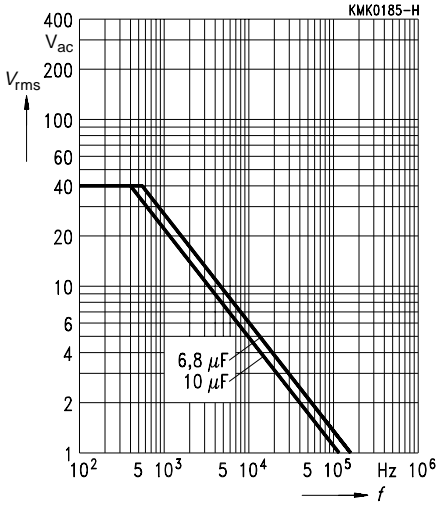


100 Vdc/ 63 Vac

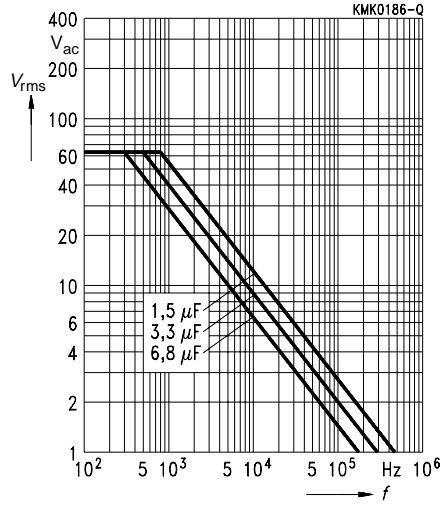


250 Vdc/ 160 Vac

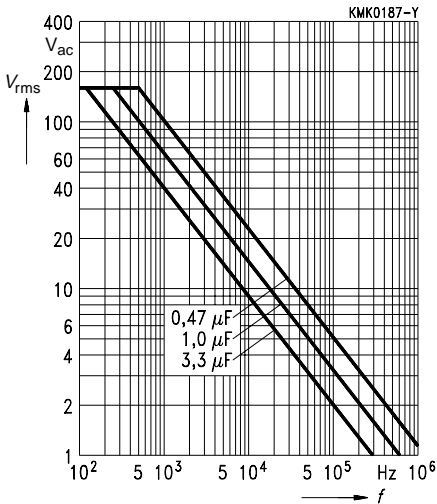

400 Vdc/ 200 Vac

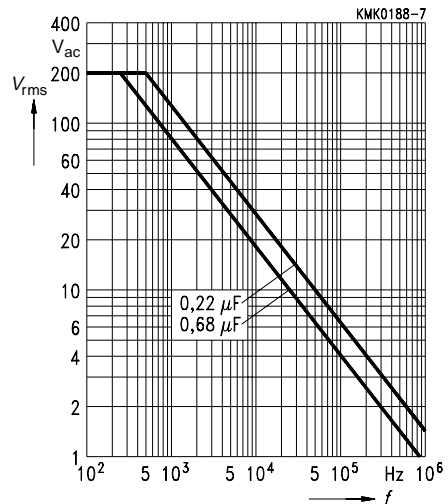





B 32 523

Permissible ac voltage V_{rms} versus frequency f

Lead spacing 22,5 mm

630 Vdc/ 200 Vac

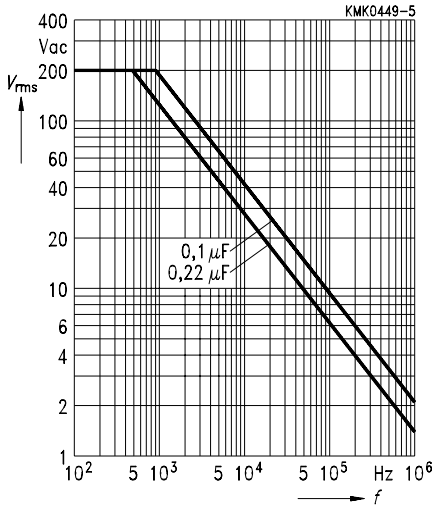





Permissible ac voltage V_{rms} versus frequency f

Lead spacing 27,5 mm


100 Vdc/ 63 Vac

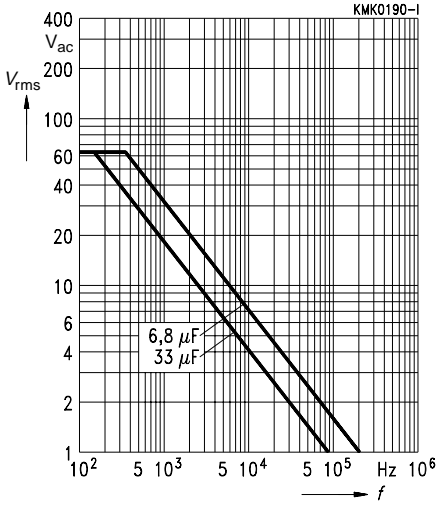

250 Vdc/ 160 Vac

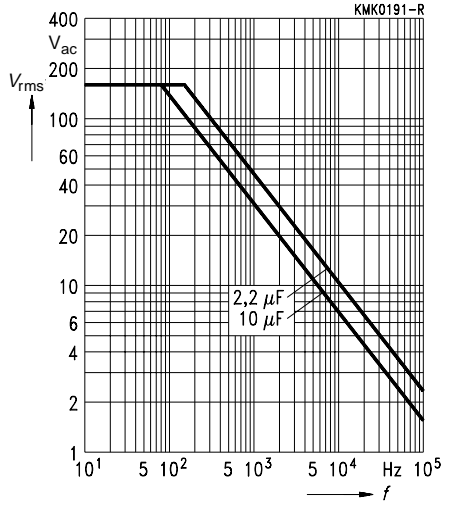

400 Vdc/ 200 Vac

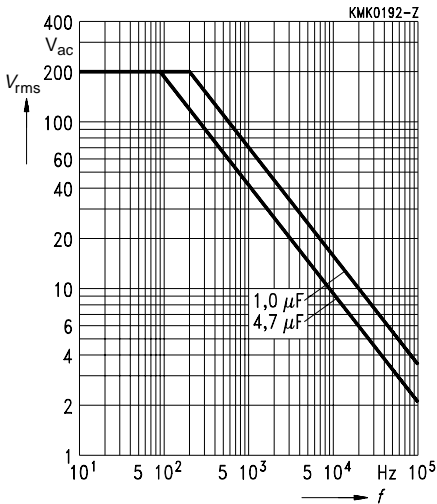

630 Vdc/ 220 Vac

